







Home ▶ All Journals ▶ Separation Science and Technology ▶ List of Issues ▶ Volume 55, Issue 7 ► Recovery enhancement of liquid hydrocarb ....

Separation Science and Technology > Volume 55, 2020 - Issue 7

198 4

Views CrossRef citations to date Altmetric

Natural Gas Processing

## Recovery enhancement of liquid hydrocarbons in dew point control unit of natural gas processing plant

Ali Jalali, Marzieh Lotfi Z. Sara Zilabi & Amir H Mohammadi Z

Pages 1407-1414 | Received 14 Aug 2018, Accepted 04 Mar 2019, Published online: 31 Mar 2019

**66** Cite this article

⚠ https://doi.org/10.1080/01496395.2019.1591450





Full Article

Figures & data

References

**66** Citations

**Metrics** 

➡ Reprints & Permissions

Read this article

## ABSTRACT

The low control t

absorpti

purity of

mention

c at the high

introduc self-refri

problem

this prod

refrigera

## We Care About Your Privacy

We and our 845 partners store and/or access information on a device, such as unique IDs in cookies to process personal data. You may accept or manage your choices by clicking below, including your right to object where legitimate interest is used, or at any time in the privacy policy page. These choices will be signaled to our partners and will not affect browsing data. Privacy Policy

We and our partners process data to provide:

Use precise geolocation data. Actively scan device characteristics for identification. Store and/or access information on a device. Personalised advertising and content, advertising and content measurement, audience research and services development.

List of Partners (vendors)

ng unit to I Accept ultaneous eads to low **Essential Onl** ns, the Show Purpose int at -23° ows very as been -85° c by cess, the

ercome. In

to 2896 kPa

pressure. Expander outlet with reflux and condensate produced from a cold separator are fed to an absorption tower with a reboiler and the separation will occur. The advantage of this method is controlling the concentration of methane in the product streams. Simulation results show that the process can daily produce 22,280 barrels of gas liquids with a concentration of 0.5 mole% of methane. In addition, the recovery efficiencies of propane and butane in the newly proposed method are 97.3% and 99.99%, respectively, which show a remarkable advantage over the current trend.

Q KEYWORDS: Self-refrigeration turbo expander absorption gas liquids dew point


## Related research (1)

People also read Recommended articles Cited by 4

Modeling of CO2 capture from gas stream emissions of petrochemical industries by membrane contactor >

Ali Jalali et al.

Petroleum Science and Technology Published online: 8 Aug 2018

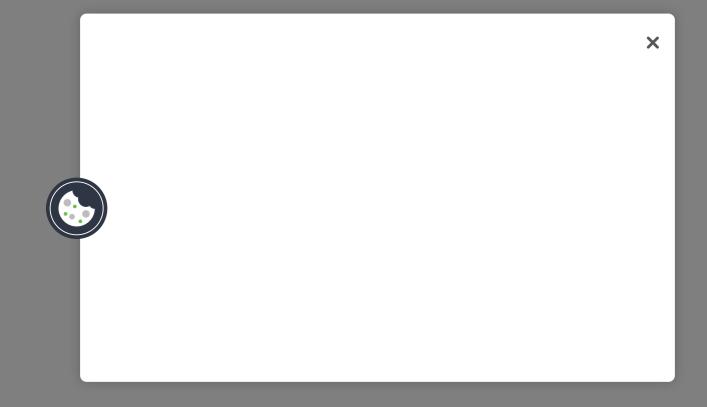

Information for Open access **Authors** Overview R&D professionals Open journals Editors **Open Select** Librarians **Dove Medical Press** Societies F1000Research Opportunities Help and information Reprints and e-prints Advertising solutions Newsroom Accelerated publication Corporate access solutions Books Keep up to date Register to receive personalised research and resources by email Sign me up Taylor & Francis Group Copyright © 2024 Informa UK Limited Privacy policy Cookies Terms & conditions Accessib X

